



# INSTALLATION

## OIL LINE NACELLE

## 8204

### PARTS INCLUDED

- 1 Chrome Nacelle
- 1 Hardware kit Containing:
  - 1 Oil Fitting Clamp — Front half
  - 1 Oil Fitting Clamp — Rear half
  - 2 #10-24 x 1-1/4" Phillips Head Screws
  - 2 #10 Split Lock Washers
  - 2 #10-24 x 5/8" Button Head Cap Screws
  - 2 #10 Wave Washers
  - 1 Bolt Cover — Chrome
  - 1 #8-32 x 1/4" Set Screw - Stainless
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

### THANK YOU FOR CHOOSING KÜRYAKYN!

**IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.**

**WARNING!** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

**ATTENTION!** This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

### TOOLS SUGGESTED

Oil Drain Pan, Clean Rags, Needle Nose Pliers, # 2 Phillips Screwdriver, Set of Hex Wrenches, Socket Set and Ratchet

**STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.**

**STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let cool.

**WARNING!** YOU WILL BE WORKING AROUND THE ENGINE AND EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED TO PREVENT INJURY.

**ATTENTION!** A factory service manual may be helpful in performing this installation. Do not attempt to perform this installation if you are not confident in your ability to complete all of the steps in the procedure; consult a trained technician.

**NOTE:** Because removal of the oil lines is required for installation of this accessory, it is recommended that installation be performed concurrent with an oil change.

### CUSTOMER SERVICE

877.370.3604 (toll free)

### INSTALLATION QUESTIONS

techsupport@kuryakyn.com  
or call 715.247.2983

### LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
  - The product must be properly installed, maintained and operated under normal conditions.
  - Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
  - Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
- Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Küryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.

• Küryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

### ABOUT OUR CATALOG

For purchasing Küryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Küryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Küryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA® All Rights reserved.



kuryakyn.com

**STEP 2** Drain the engine oil.

**STEP 3** Remove the hose clamp from the "feed" oil line (where the rubber hose joins to the chrome oil line, under the right side of the oil tank). Separate the chrome line from the rubber hose.

**STEP 4** See PIC.1. Remove these two oil lines.

**STEP 5** See PIC.2. "Pinch" the two plastic tabs together in the lower oil line fitting on the engine, and carefully pull the oil line out of the fitting.

**NOTE:** Inside each fitting there will be two o-rings, and one plastic washer — **be careful not to lose them!**

**STEP 6** At the top of the upper oil line, there will be a circular chrome cover where the line joins the oil tank. Simply slide this cover back to expose the same type of plastic oil line retainer clip. (See PIC.3) Remove it in the same manner, and remove the oil line.

**STEP 7** Install the nacelle mounting clamp as shown in PIC.4, using the two #10-24 x 1-1/4" screws and #10 split locks.

**STEP 8** Using the two #10-24 x 5/8" button heads and wave washers, attach the chrome nacelle to the mounting bracket. Install the chrome bolt cover as shown in PIC.5.







**STEP 9** Make sure the o-rings and washer are in place in each of the fittings, and then re-install the oil lines.

**STEP 10** Replace the hose clamp on the "feed" line that was previously removed. Slide the circular chrome cover back into position where the oil line meets the oil tank. Reinstall the oil line separator clip. See PIC.6 for the finished version.

**STEP 10** Refill the oil tank with the correct quantity of oil.

**STEP 11** Start the engine and inspect for oil leaks.

**ATTENTION!** It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

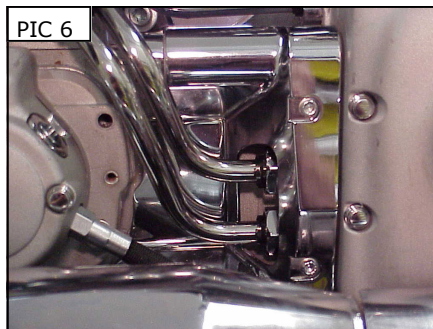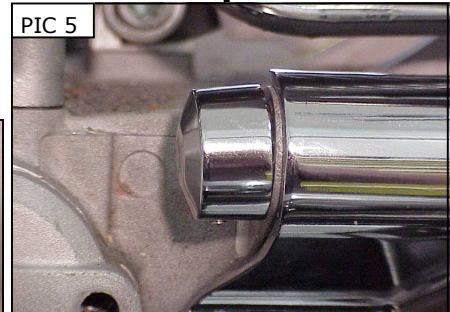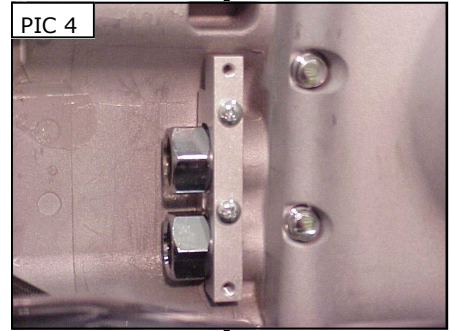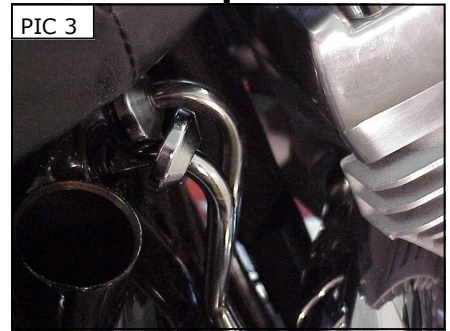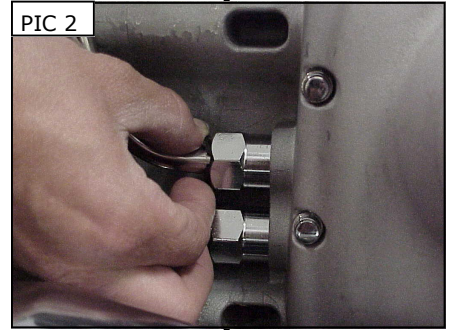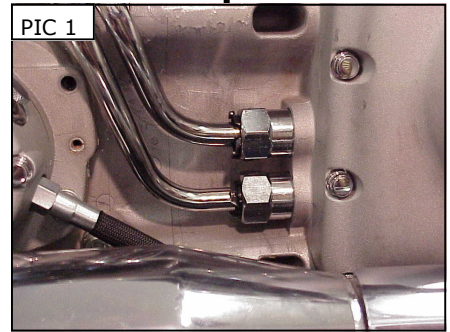

*Ride On!*